

EMC-1008-3P

EMC-1008-3P-B

EMC-1008-3P

MAGNETIC CONTACT


FEATURES :

- ✓ Adhesive Tape Included
- ✓ Easy Installation
- ✓ Dual Contact : NO & NC
- ✓ Mini Size
- ✓ Hermetically Sealed Switch
- ✓ Rhodium Over Gold Reeds


SPECIFICATIONS :

- 1 Max. Contact Rating : 30VDC, 0.1A, 3W
- 2 Magnetic Contact Type : (NO) & (NC)
- 3 Colour Available : (White / Brown)
- 4 Reed Switch Contact Type : SPDT
- 5 Sensor Range : 16 mm (±5%)
- 6 Installation : Surface Mounting
- 7 Wire Length : 120 mm
- 8 Net Weight : 8 gm
- 9 Size : 28 x 12 x 8 mm

PRODUCT DIAGRAM

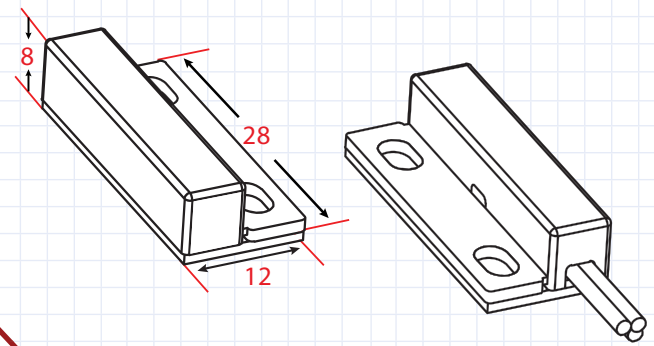

FUNCTIONAL DIAGRAM

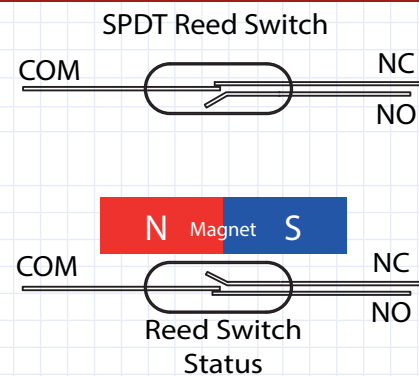

BELTM Magnetic Contact Sensor EMC-1008-3P is Specially Designed for SPDT Output which suits for Normally Open & Normally Close Feature. The Door Contact Sensor are suitable for Central or Standalone Control Monitoring Systems. It can be used for sliding doors and windows where space is limited. Reed Switch Contact is SPDT, Hermetically Sealed Switch & Rhodium Over Gold Reeds for a long life. The model is moulded with the Highest Engineering Precision. The ABS material used is noted to be high resistance to heat and with good impact strength.

