


[U1-1200]


[OPTIONAL BRACKET]

[GLASS DOOR APPLICATION]

BRACKET APPLICATION

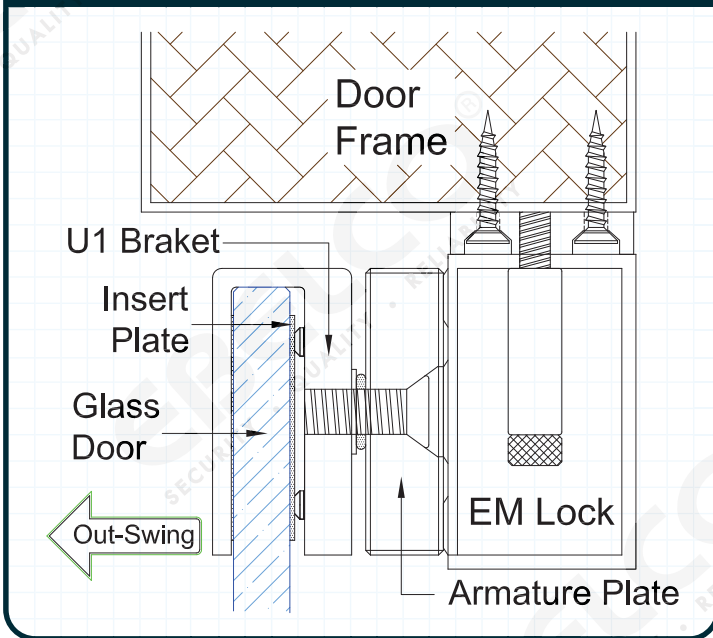


SPECIFICATIONS [UNIT = MM]

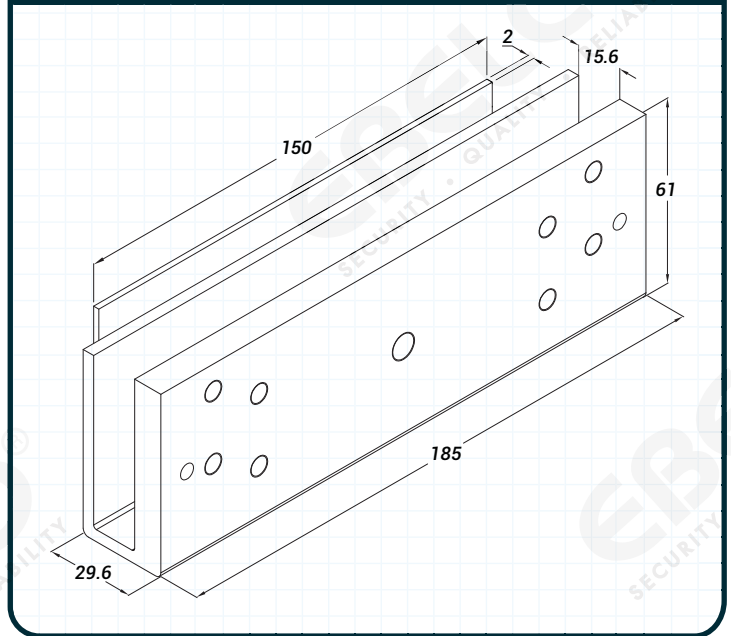

INSTALLATION METHOD

Notes

- + Suitable for frameless glass door thickness 10-12mm.
- + U1-1200 Bracket can be mount to ZL-1200 bracket for Glass Door In-Swing application.

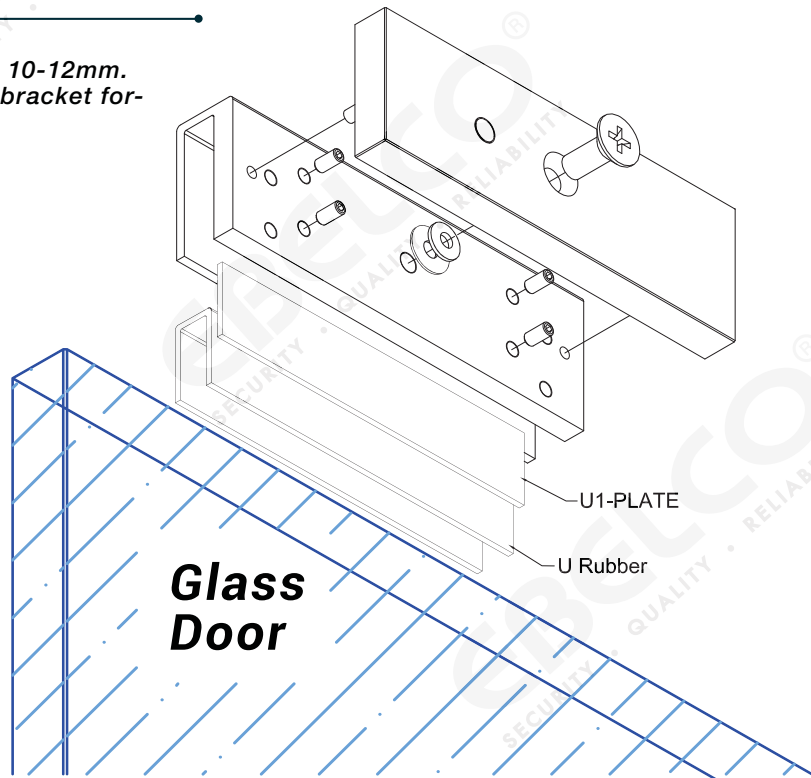

DISCLAIMER : EISB reserve the right to change with any modifications or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

SECURITY . QUALITY . RELIABILITY

EBELCO INDUSTRIES SDN. BHD. 474704-V

16, Jalan TTC 26, Taman Teknologi Cheng,
75250, Melaka, Malaysia.

☎ : [+606] 333 8855 ☎ : [+606] 333 8822

🌐 : www.ebelco.com ✉ : enquiry@ebelco.com



WWW.EBELCO.COM